


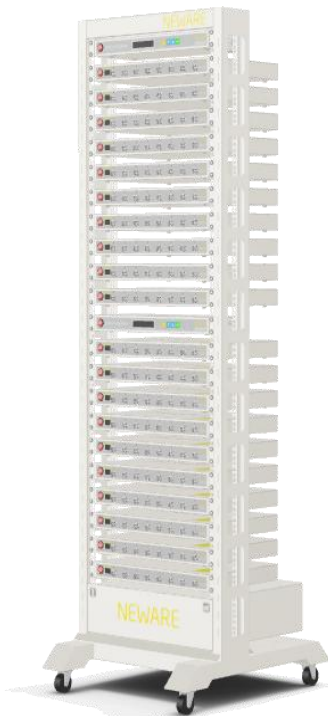


BTS-4008Q-5V100mA-124 Battery Testing System		
Single Tester (Image for reference only)		
Dimension	483mm x 310mm x 48mm	
Cable Length Selection	<input type="checkbox"/> 0.1m (suitable for running tests in room temperature)	
	<input type="checkbox"/> 2.0m (suitable for running tests in environmental chambers)	
Clamp Selection	<input type="checkbox"/> polymer coin cell clamps (connecting to coin cells)	
	<input type="checkbox"/> alligator clips (connecting to swagelok, metal-air battery, special mould etc.)	
Full Rack (Image for reference only) Holds maximum 20pcs testers in one rack		
Dimension	660mm x 760mm x 1950mm	

Electrical Performance			
Items		Values	
Channel counts		8 channels	
Input AC		□ 220Vac ±10% 50Hz	
		□ 110Vac ±10% 60Hz	
Input power		25W	
Resolution		AD: 24bit; DA: 16bit	
Input impedance		≥1GΩ	
Leak Current		0.005μA	
Voltage	CV output range	10mV~5V	
	Min discharge	-5V	
	Accuracy	± 0.01% of FS	
	Stability	± 0.01% of FS	
Current	Output range/ CH	R1: 0.5μA~0.1mA	
		R2: 0.1mA~1mA	
		R3: 1mA~10mA	
		R4: 10mA~100mA	
	Accuracy	± 0.02% of FS	
	CV cut-off current	R1: 0.1μA	
		R2: 1μA	
		R3: 10μA	
		R4: 100μA	
	Stability	± 0.02% of FS	
Power	Output power / CH	0.5	W
	Stability	± 0.1% of FS	
Time	Current	≤1ms (10%to 90% or 90%~100%)	
	Working step time	≤(365*24) hrs/step	Format: 00:00:00:00 (hr : min : s : ms)
Data record	Data record conditions	Min data record interval: 100ms	
		Min voltage change: 5mV	
		Min current change: R1: 0.1μA R2: 1μA R3: 10μA R4: 100μA	
	Frequency	10Hz	
Charge	Charge modes	CC / CV / CCCV / CP	
	Cut-off condition	Voltage / Current / ΔTime / Capacity / Energy / -ΔV	
Discharge	Discharge modes	CC / CP / CR / CV/ CCCV	
	Cut-off condition	Voltage / Current / ΔTime / Capacity / Energy	

Pulse	Charge	CC / CP
	Discharge	CC /CP
	Minimum Pulse	500ms
	Pulse counts	up to 32
	Continuous switching	Support continuous charge steps, or continuously discharge steps Does not support from charge to discharge switching
	Cut-off condition	Voltage / ΔTime
DCIR		Supported
Cycle	Max cycles	65535
	Max steps	254
	Cycle nest	max. 3
Protection	Safety protection	● Power-off data protection
		● Off-line operation mode
		● User-defined protection conditions, such as upper and lower limited current/voltage, delay time, temperature, etc.
IP protection level		IP 20
Channels feature		Independent pairs of closed loop for CC source and CV source
Channels control mode		Independent control
Data acquisition method		Kelvin connection (4-wire)
Noise		<45dB
Database		MySQL
Communicatin		TCP/IP
Operating system		Windows 7/8/10 64bit
Data export		EXCEL / TXT
Disk drive		500GB
Communication port		Ethernet port
Operation and storage environment requirement		
Items		Values
Operationenvironment temperature		0~40℃ (Limiting temperature) 25±10℃ (Guaranteed accuracy of 0.005% of FS/℃)
Storage environmenttemperature		-10℃~50℃
Operation environment humidity		≤70% RH (no moisture condensation)
Storage environment humidity		≤80% RH (no moisture condensation)